


made in stainless steel AISI 304 - AISI 316 upon request

**Floor drains with vertical outlet pipe and double siphoning.**  
**Removable filter basket and square top plate..**




Draw. N° 0105

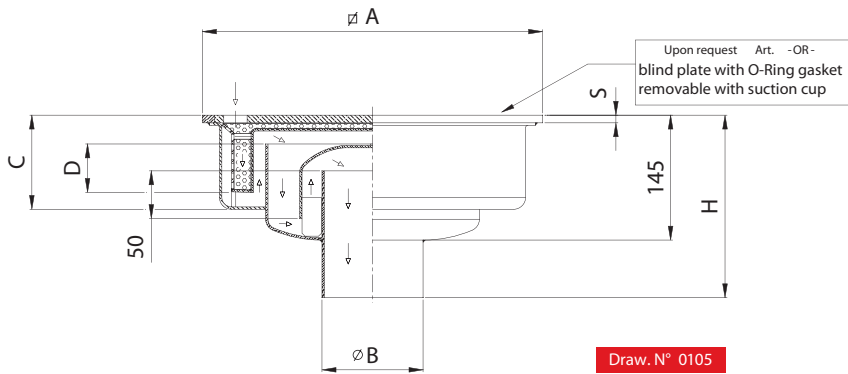


Article	Measure in mm						Capacity lt/min	Max. load in Kg	
	∅ A	S	∅ B	C	D	H		LOAD CONCENT	LOAD DISTRIB
110 V 358 DS	350	8	110	130	50	220	120	900	8000

**Inspection covers with square top plate and open bottom,**  
**with round blind plate with O-Ring gasket.**

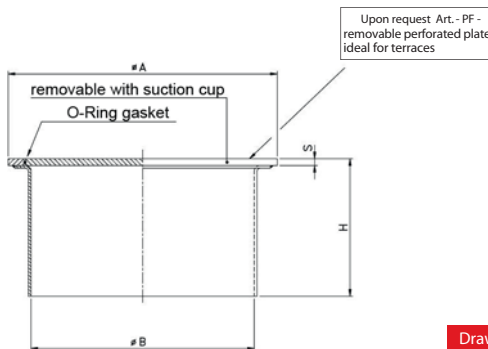


Draw. N° 0602

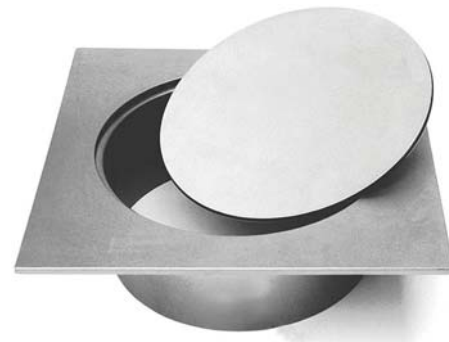

Article	Measure in mm					Max. load in Kg		
	∅ A	S	∅ B	H	LOAD CONCENT	LOAD DISTRIB		
75 OR 106	100	6	75	50	1000	10000	with perforated plate ideal for terraces outlets	
110 OR 156	150	6	110	50	1000	10000	with perforated plate ideal for terraces outlets	
160 OR 206	200	6	160	50	1000	10000		
215 OR 258	250	8	215	50	1000	10000		
215 OR 308	300	8	215	50	1000	10000		
315 OR 358	350	8	315	50	900	8000		

**Ultralow floor drains with direct outlet pipe, built for a**  
**minimal volume height, ideal for terraces or spaces with limited depth.**

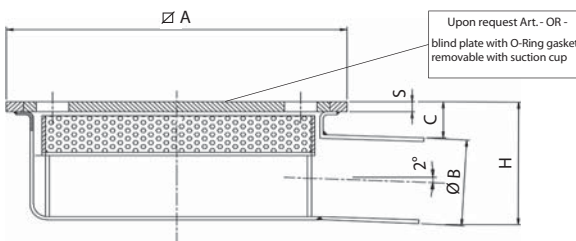

Draw. N° 0024



N.B. - All measures can be modified upon request

Article	Measure in mm					Capacity lt/min	Max. load in Kg	
	∅ A	S	∅ B	C	H		LOAD CONCENT	LOAD DISTRIB
D30L156	150	6	30	20	50	10	1000	10000
D40L206	200	6	40	20	60	20	1000	10000
D50L258	250	8	50	20	70	50	1000	10000
D63L308	300	8	63	30	93	60	1000	10000

N.B.: - All measures can be modified upon request.

- These drawings are property of INOXSYSTEM®. They cannot be used or copied without our formal permission.