


made of grade 304 stainless steel - grade 316 on request


Floor drain with odor trap and filter basket, with round flange for waterproof membrane application.

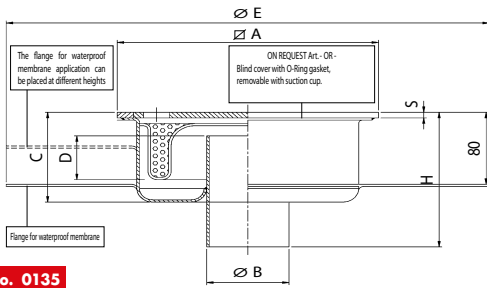

Dwg. No. 0135

N.B. - Some dimensions can be made custom


Article	DIMENSIONS IN mm							FLOW RATE lt/min	LOAD CAPACITY IN Kg	
	$\varnothing A$	S	$\varnothing B$	C	D	H	$\varnothing E$		CONCENTRATED LOAD	DISTRIBUTED LOAD
SG 110 VCE 308	300	8	110	110	55	180	400	135	1000	10000

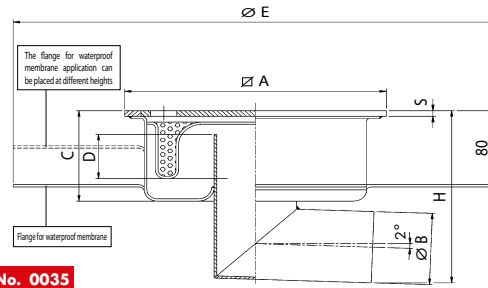

Dwg. No. 0035

N.B. - Some dimensions can be made custom

Article	DIMENSIONS IN mm							FLOW RATE lt/min	LOAD CAPACITY IN Kg	
	$\varnothing A$	S	$\varnothing B$	C	D	H	$\varnothing E$		CONCENTRATED LOAD	DISTRIBUTED LOAD
SG 110 LCE 308	300	8	110	110	55	220	400	135	1000	10000

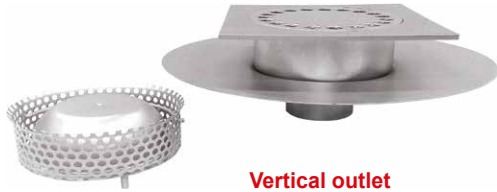

Vertical outlet


The flange for waterproof membrane application can be installed also on the floor drains at page 8 and 9



Horizontal outlet

Telescopic floor drain with odor trap and filter basket, with round flange for waterproof membrane application.


Telescopic solution enables height adjustment of the gully and fast installation on site.
The round flange is ideal for application of waterproof membrane.

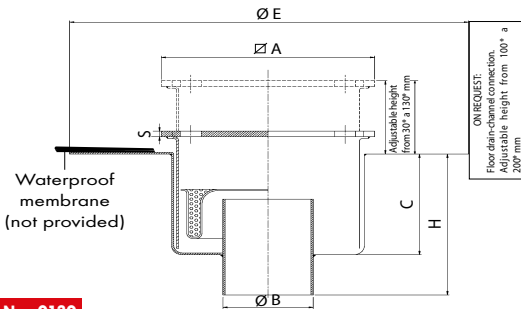

Dwg. No. 0130

N.B. - Some dimensions can be made custom

Article	DIMENSIONS IN mm							FLOW RATE lt/min	LOAD CAPACITY IN Kg	
	$\varnothing A$	S	$\varnothing B$	C	H	$\varnothing E$	CONCENTRATED LOAD		DISTRIBUTED LOAD	
CT 110 VCE 308	300	8	110	140	210	500	135	1000	10000	

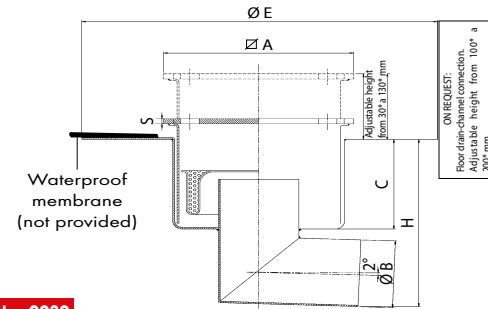

Dwg. No. 0030

N.B. - Some dimensions can be made custom

Article	DIMENSIONS IN mm							FLOW RATE lt/min	LOAD CAPACITY IN Kg	
	$\varnothing A$	S	$\varnothing B$	C	H	$\varnothing E$	CONCENTRATED LOAD		DISTRIBUTED LOAD	
CT 110 LCE 308	300	8	110	140	250	500	135	1000	10000	




Vertical outlet




Horizontal outlet

Inoxsystem® type stainless steel pipe union ("Mexican" pipe union).

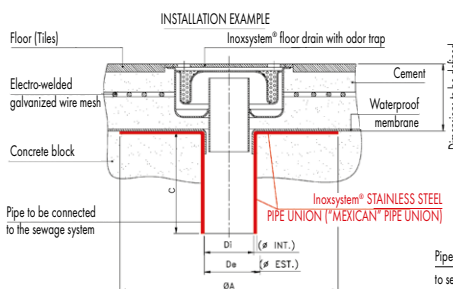

Dwg. No. 0710

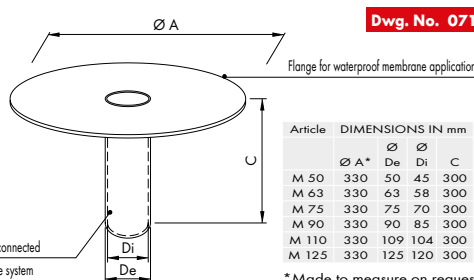

Article	DIMENSIONS IN mm				Maximum \varnothing size of floor drains outlet
	$\varnothing A^*$	\varnothing	D_i	C	
M 50	330	50	45	300	Suitable for \varnothing 40
M 63	330	63	58	300	Suitable for \varnothing 50
M 75	330	75	70	300	Suitable for \varnothing 63
M 90	330	90	85	300	Suitable for \varnothing 80
M 110	330	109	104	300	Suitable for \varnothing 90
M 125	330	125	120	300	Suitable for \varnothing 110

* Made to measure on request



Dimensions can be modified on request.

These technical drawings are property of INOXSYSTEM® and cannot be copied or reproduced without our prior written permission.